

# J-Series Juicer

**Sunkist**  
FOODSERVICE EQUIPMENT

Quality products. Built to last.



## Proven performance juicer

### COMMERCIAL

### J-Series Juicer

- Quiet, yet heavy duty, high-torque motor
- Unique oscillating strainer
- Years of proven performance
- 3 Interchangeable extracting bulbs: Orange, Lemon/Lime & Grapefruit
- Quick & easy cleaning - 4 lift-off dishwasher safe parts
- Two-year warranty

### ACCESSORIES



**Sunkist**  
FOODSERVICE EQUIPMENT

See your preferred FSE Distributor

AQ AutoQuotes  
from

📞 Sunkist consumer call center: (800) 572-3331 / +1 910-693-4277


🌐 [sunkistequipment.com](http://sunkistequipment.com)

# Commercial Juicer Information

**Sunkist**  
FOODSERVICE EQUIPMENT

MODEL	COLOR	DESCRIPTION
J-1	CHROME	115 V / 60 Hz 1725 RPM
J-2CE	CHROME	230 V / 50 Hz 1425 RPM
J-2	CHROME	230 V / 50 Hz 1425 RPM
J-2CCC	CHROME	230 V / 50 Hz 1425 RPM, China Certified

- 1 Plastic Bowl Assembly incl.  
Dome (10A), spout (10B) & Bowl Support (10)
- 2 Extracting Bulb Set w/metal insert (Only use with 17 or 17C)
  - A. Lemon/Lime fits #8 model
  - B. Orange fits #7 & #8 models
  - C. Grapefruit fits #7 & #8 models
- 2R Extracting Bulb Set w/o metal insert (Only use with 17R)
  - A. Lemon/Lime fits #8 model
  - B. Orange fits #7 & #8 models
  - C. Grapefruit fits #7 & #8 models
- 3 Lever Lock & Screws for Strainer (For #7 juicer-not illustrated)
- 4 Strainer w/Lever Lock & Screws (For #7 juicer-not illustrated)
- 4A Strainer for #8 juicer
- 4C Strainer Puller for #8 juicer
- 6 Bowl Support Screws, Spacers, Washers (set of 3)
- 7 Umbrella Ring w/Set Screw & Gasket (Not illustrated)
- 7B Umbrella Seal  
(only for grooved eccentric housings, replaces 7, 8, &9)
- 8 Umbrella Ring Set Screw (incl'd w/7 not illustrated)
- 9 Umbrella Ring Gasket (incl'd w/7 not illustrated)
- 10 Plastic Bowl Support only (incl'd w/1)
- 10A Plastic Dome only (incl'd w/1)
- 10B Plastic Spout only (incl'd w/1)
- 11 Bowl Support Gasket
- 12 Chrome Motor Housing
- 13 Electric Cord Bushing
- 14 Electric Cord 115/60
- 14A Robber Cord-Export
- 15 Toggle Switch w/Switch Guard (not illustrated)
- 15D Rocker Switch w/Switch Seal
- 15E Connectors for 14 & 15D (Set of 4 not illustrated)
- 16 Rubber Feet (set of 3)
- 17 Shaft Tip w/Pin (Only use w/2A, 2B and/or 2C not illustrated)
- 17C Shaft Tip w/Pin (Graduated tip-not illustrated)
- 17R Shaft Tip w/Pin (Flat tip-only use w/2AR, 2BR, 2CR not illustrated)
- 18 Eccentric Housing Gasket (incl'd w/20)
- 18A Shaft Tip Gasket (fits 17C & 17R)
- 19 Brass Tube
- 20-7 Eccentric Housing w/Bearings, Gasket & Brass Tube #7 juicer
- 20-8 Eccentric Housing w/Bearings, Gasket & Brass Tube #8 juicer
- 20-8C Eccentric Mechanism #8 juicer
- 22 Eccentric Hub w/Bearing & Screw
- 24 Eccentric Hub Hex Screw 1/4-20x1/2
- 25 Spring Screw to Motor Mount 10-32
- 26 Lock Washers incl. 36 (2) & 37 (3)
- 27 Bronze Bushing Coil Spring to Motor Mount 9/64 x 3/8 x 1/4
- 28 Coil Spring
- 29 Bronze Bushing Coil spring to Ecc. Housing 9/63 x 3/8 x 3/16
- 30 Arm Screw-Small 1/4-32 x 1 1/16
- 31 Arm Screw-Large 1/4-20 x 29/32
- 33 Spring Screw to Ecc. Housing 1/4-32
- 34 Eccentric Arm
- 35 Ecc. Arm Bronze Bushing 1/2 x 3/16 x 5/16
- 36 Lock Washer, 3/16, Internal Tooth
- 37 Lock Washer, 1/4, Internal Tooth
- 40 Top Motor Casting

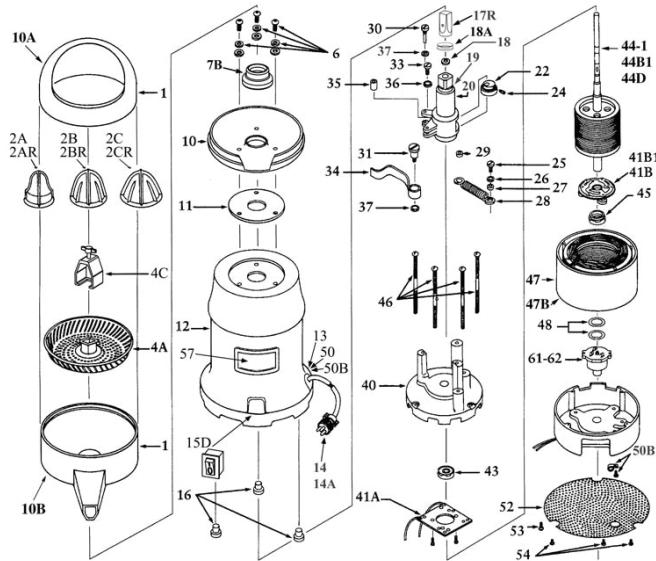

## SPECIFICATION

Chrome plated steel housing.  
Corrosion proof plastic dome, spout & bowl support.  
Listed by UL, CUL, CE, CCC, NSF  
Shipping Weight 37 pounds  
Net Weight 31 pounds  
Overall Dimensions 17" high, 8" diameter  
Cube 1.12  
Carton Size 22 3/4" x 9 3/4" x 9 3/4"  
Horsepower 1/4 continuous-operating

## PART DESCRIPTION

- 41A: Stationary Motor Switch
- 41B: Centrifugal Motor Switch 115V
- 43: Motor Bearing-top or bottom
- 44-1: Rotor w/Shaft 115/60
- 44B1: Rotor w/Shaft 230/50
- 44D: Rotor w/Shaft 230/60
- 45: Motor Bearing-top or bottom
- 46: Motor Screws (set of 4)
- 47: Stator (winding) 115/60
- 47B: Stator (winding) 230/50
- 48: Tension Washers (set of 2)
- 50: Electric Cord Strain Relief; J-2
- 50B: Electric Cord Strain Relief; J-1, J-4
- 52: Perforated Base Plate
- 53: Ground Screw w/Lock Washer for J-1, J-2 (set of 2)
- 54: Base Plate Screws for J-1, J-4 3/ea
- 57: Logo Plate, Label & Fasteners
- 61: Thermal Overload 115/60
- 62: Thermal Overload 230/50
- 64: Model #7 or #8 Motor 115/60 4.3 amp - 1725 rpm
- 65: Model #7 or #8 Motor 230/50 2.5 amp - 1425 rpm
- 67: Model #7 or #8 Motor